

PZS-5 / PZS-6


REMOTE CONTROL RELAYS

PZS - is remote street lighting network control relay in the cascade set.

Giving phase voltage on any number of control inputs closes the passage between the output terminals. Between the input and the output side there is a full galvanic isolation.



WIRING DIAGRAMS

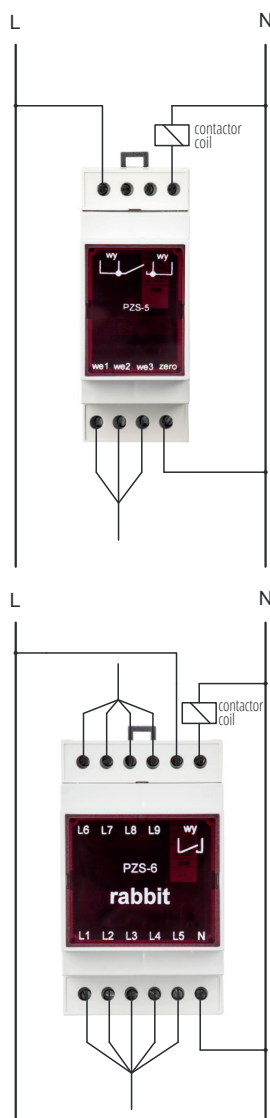

FEATURES OF THE DEVICE

- direct interaction with contactor
- optical indication for work
- galvanic isolation of the output circuit from control inputs

TECHNICAL SPECIFICATIONS

- supply voltage: 230 V +10/-30%, 50 Hz
- driver size (width / height / depth):
PZS-5 - 35 x 95 x 58 mm
PZS-6 - 52 x 95 x 58 mm
- width of the device:
PZS-5 - 2 modules
PZS-6 - 3 modules
- number of outputs: 1
- outputs current capacity: 16 A/230 V
- number of inputs:
PZS-5 - 3 control inputs
PZS-6 - 9 control inputs
- operating temperature: from -30 °C to +50 °C
- protection degree: IP20
- DIN rail mounting