

1


2

3

4




5

6



main contactor

street lighting power supply circuits



rabbit

SYSTEMY STEROWANIA OŚWIETLENIEM ULICZNYM

soft start LED

U_z 230VAC +5 / -10 %, 50Hz
 I_{obc.} 20A 230VAC
 Ta (°C) -30 / +85



MADE IN EU



SYSTEMY STEROWANIA OŚWIETLENIEM ULICZNYM

Rabbit Sp. z o.o.
 ul. Krakowska 141-155, 50-428 Wrocław
 tel. +48 71 328 50 65
 projekty@rabbit.pl
 www.rabbit.pl


Soft start LED - starting current limiter

Wiring diagram

Soft start LED

Page: 1 / 2

Date: 01.04.2022



DIN A4

Scale: ---

1




2




3

4

5

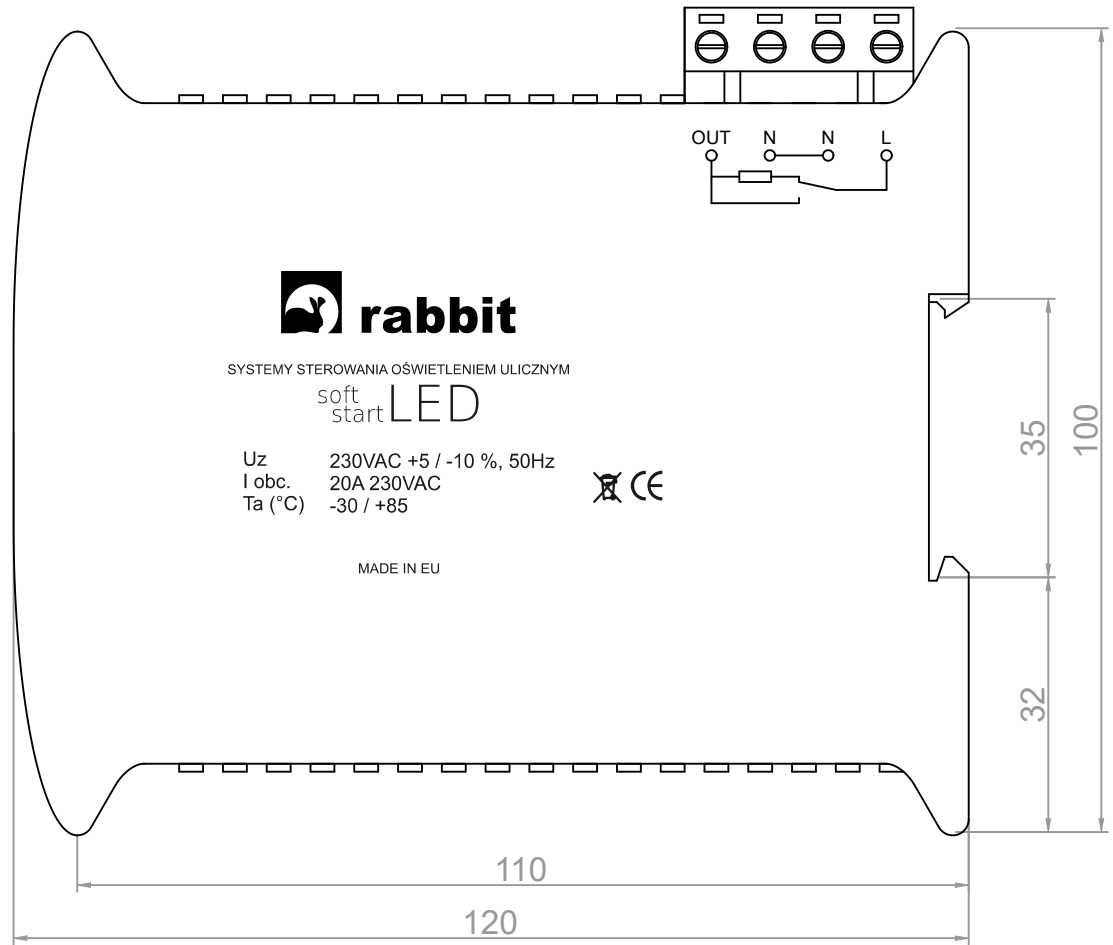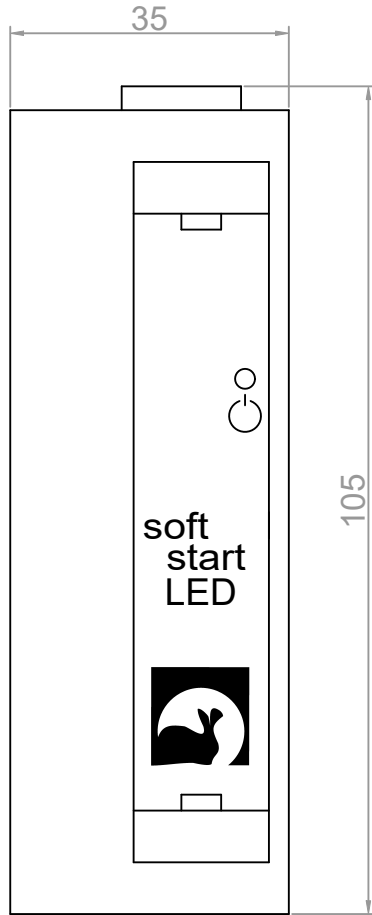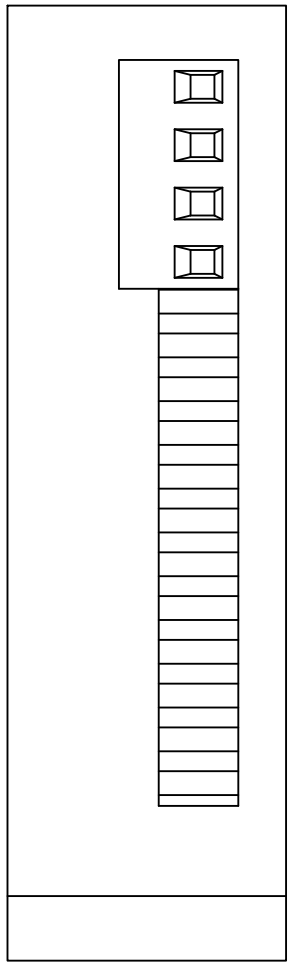6



 rabbit <small>SYSTEMY STEROWANIA OŚWIETLENIEM ULICZNYM</small>	Soft start LED - starting current limiter	
	Rabbit Sp. z o.o. ul. Krakowska 141-155, 50-428 Wrocław tel. +48 71 328 50 65 projekty@rabbit.pl www.rabbit.pl	Soft start LED   DIN A4
	Page: 2 / 2	Date: 01.04.2022
		Scale: 1:1